






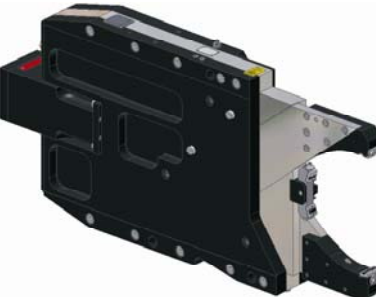


## World Leader in Steady Rest Technology

Grinding Auto Rest® self centering steady rest - Standard models

| Model  | Dimensions                                      | Standard Clamping Range(s)   | Features  |
|--|---|--|---|
| <b>GR-081</b><br>     | Length: 132.9<br>Width: 21.1<br>Arm width: 6.4  | <ul style="list-style-type: none"> <li>• 8.0 to 2.5 Diameter</li> <li>• 3.0 to 1.0 Diameter (with special pads)</li> <li>• 41.0 Max Swing Diameter</li> </ul>                  | <ul style="list-style-type: none"> <li>• Fixed Range Design</li> <li>• Fixed and Follow Down operation</li> <li>• Horizontal Centerline Adjustment</li> </ul>                 |
| <b>GR-055V</b><br>   | Length: 295.7<br>Width: 45.0<br>Arm width: 19.0 | <ul style="list-style-type: none"> <li>• 40.0 to 30.0 Diameter</li> <li>• 30.0 to 20.0 Diameter</li> <li>• 20.0 to 10.0 Diameter</li> <li>• 88.0 Max Swing Diameter</li> </ul> | <ul style="list-style-type: none"> <li>• Flexible Range Design</li> <li>• Fixed and Follow Down operation</li> <li>• Vertical and Horizontal Centerline Adjustment</li> </ul> |
| <b>GR-3520V</b><br> | Length: 306.5<br>Width: 39.1<br>Arm width: 16.0 | <ul style="list-style-type: none"> <li>• 35.0 to 20.0 Diameter</li> <li>• 70.0 Max Swing Diameter</li> </ul>   | <ul style="list-style-type: none"> <li>• Fixed Range Design</li> <li>• Fixed and Follow Down operation</li> <li>• Vertical and Horizontal Centerline Adjustment</li> </ul>    |
| <b>GR-115V</b><br>  | Length: 355.8<br>Width: 45.0<br>Arm width: 19.0 | <ul style="list-style-type: none"> <li>• 60.0 to 45.0 Diameter</li> <li>• 45.0 to 30.0 Diameter</li> <li>• 30.0 to 15.0 Diameter</li> <li>• 95.0 Max Swing Diameter</li> </ul> | <ul style="list-style-type: none"> <li>• Flexible Range Design</li> <li>• Fixed and Follow Down operation</li> <li>• Vertical and Horizontal Centerline Adjustment</li> </ul> |
| <b>GR-6030V</b><br> | Length: 355.8<br>Width: 45.0<br>Arm width: 19.0 | <ul style="list-style-type: none"> <li>• 60.0 to 30.0 Diameter</li> <li>• 95.0 Max Swing Diameter</li> </ul>   | <ul style="list-style-type: none"> <li>• Fixed Range Design</li> <li>• Fixed and Follow Down operation</li> <li>• Vertical and Horizontal Centerline Adjustment</li> </ul>    |

|   |  |   |  |
|---|--|---|--|
| <p><b>GR-320V</b></p>                                    | <p>Length: 424.9<br/>Width: 60.0<br/>Arm width: 31.8</p> | <ul style="list-style-type: none"> <li>• 90.0 to 70.0 Diameter</li> <li>• 70.0 to 50.0 Diameter</li> <li>• 50.0 to 30.0 Diameter</li> <li>• 30.0 to 10.0 Diameter</li> <li>• 130.0 Max Swing Diameter</li> </ul>  | <ul style="list-style-type: none"> <li>• Flexible Range Design</li> <li>• NR Follow Down</li> <li>• NX Fixed Operation</li> <li>• Vertical and Horizontal Centerline Adjustment</li> </ul> |
| <p><b>GR-1000V</b></p>                                   | <p>Length: 511.8<br/>Width: 54.0<br/>Arm width: 18.3</p> | <ul style="list-style-type: none"> <li>• 82.5 to 73.5 Diameter</li> <li>• 73.5 to 64.5 Diameter</li> <li>• 64.5 to 55.5 Diameter</li> <li>• 55.5 to 46.5 Diameter</li> <li>• 46.5 to 37.5 Diameter</li> <li>• 37.5 to 28.5 Diameter</li> <li>• 28.5 to 20.0 Diameter</li> <li>• 200.0 Max Swing Diameter</li> </ul> | <ul style="list-style-type: none"> <li>• Flexible Range Design</li> <li>• NR Follow Down</li> <li>• NX Fixed Operation</li> <li>• Vertical and Horizontal Centerline Adjustment</li> </ul> |
| <p><b>LARGE CRANKSHAFT AND SPECIALTY GRINDERS</b></p>  | <p>Contact Arobotech</p>                                 |   |  |

Complete systems include:

- Grinding AUTO REST® (standard, modified standard or custom)
- Mounting bases
- Hydraulic and electric packages
- Automatic lubrication units
- Installation and training

Contact Arobotech Systems for help in selcting the correct Grinding AUTO REST® product for your application.