
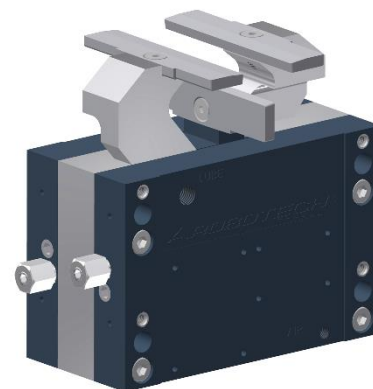


# GC19722A

## Grinding AUTO REST®

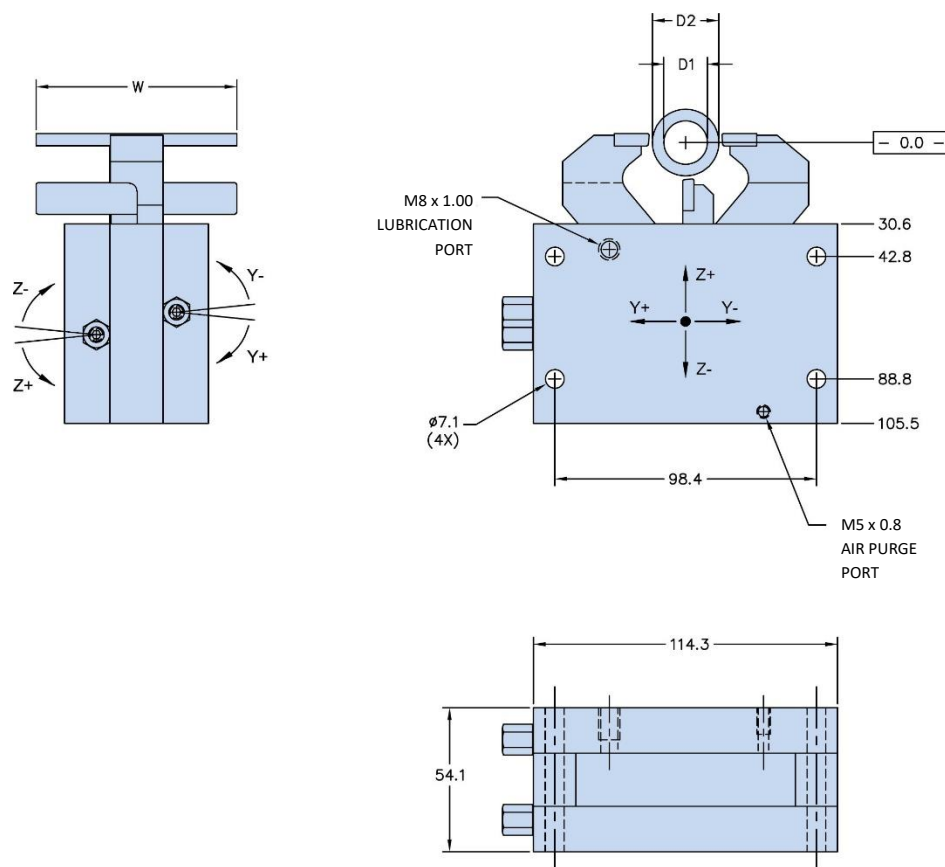

| Pad Set                |    |    | 2  | 3  | 4  | 5  | 6  | 7  | 8    | 9    | 10   | 11   |
|------------------------|----|----|----|----|----|----|----|----|------|------|------|------|
| Minimum Clamp Diameter | D1 | mm | 2  | 3  | 3  | 3  | 3  | 3  | 10   | 10   | 10   | 18.5 |
| Maximum Clamp Diameter | D2 | mm | 4  | 10 | 10 | 10 | 10 | 10 | 18.5 | 18.5 | 18.5 | 26.5 |
| Width                  | W  | mm | 50 | 10 | 15 | 25 | 45 | 82 | 40   | 70   | 108  | 170  |

|                         |     |                                       |
|-------------------------|-----|---------------------------------------|
| Z-Axis Adjustment Range | mm  | ±0.13                                 |
| Y-Axis Adjustment Range | mm  | ±0.08                                 |
| Piston Area             | cm2 | N/A                                   |
| Cylinder Stroke         | mm  | N/A                                   |
| Operating Pressure      | bar | N/A                                   |
| Maximum Pressure        | bar | N/A                                   |
| Air Purge Pressure      | bar | 0.3 – 0.5                             |
| Lubrication Volume      | cm3 | 0.02 – 0.03                           |
| Lubrication Frequency   |     | Working Cycle<br>(or every 6 minutes) |
| Repeatability           | mm  | ±0.001                                |
| Mass                    | kg  | 4.6                                   |

\*\* Contact sales@arobotech.com for pads not listed above

### Included Features

- \* 2-Axis Centerline Adjustment
- \* Air Purge Port

### Items Required To Use

This Product:

- \* Set of Wear Pads
- \* Mounting Base
- \* Drive Mechanism

### Note

**This Model Requires OEM Supplied Drive Mechanism**